www.goodway.com .tw

DP to HDMI Adapter

The DisplayPort to HDMI Adapter is designed for connecting a DisplayPort embedded device (laptop, desktop and etc.) to a HDMI embedded device (television, monitor and etc.). With the HDMI and DisplayPort 1.2a specifications, this adapter's bandwidth of video can be reached to 3.0 Gbps and the resolution is up to 2160p. Besides, plug and play design makes it easy to use; no need to install extra drivers when plugging the adapter into the device. Simply attach the adapter to the device and begin using right away. *Incorporates HDMI[®] technology.

Features

Features

- Support Plug & Play for easy use; no extra drivers needed
- High resolution up to 3840 x 2160@30Hz
- Compliant with HDMI up to 3.0Gbps
- Compliant with DP 1.2a

System Requirements

- Operating Systems:


System Requirements

- Microsoft: Windows® 7/
- Windows[®] 8/ Windows[®] 8.1 - Apple: Mac OS®



User's Manual x 1 DP to HDMI Adapter x 1



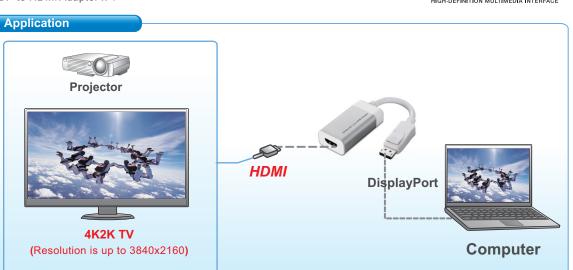

AY1260

GOOD WAY TECHNOLOGY CO., LTD.



3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1 http://www.goodway.com.tw E-mail:sales@goodway.com.tw

Connector	Host Interface	DisplayPort / Mini DisplayPort
	Video Output	HDMI Connector
Resolution		3840 x 2160@30Hz
Operating System	Microsoft	$Windows^{\ensuremath{ extsf{8}}}$ 7, $Windows^{\ensuremath{ extsf{8}}}$ 8, $Windows^{\ensuremath{ extsf{8}}}$ 8.1
	Apple	Mac OS [®]
Power	Power Mode	Bus-powered, 3.3V
	Power Consumption	Maximum (4K Mode): 782mW
		Standby Mode: < 400mW
Physical Properties	Housing	Alumimum + Plastic (PC+ABS)
	Dimension	53(L) x 27(W) x 15(H) mm
	Weight	58.7g
Working Environment	Operation Temperature	10~40 degree
	Storage Temperature	-20~70 degree
Compliance	CE, FCC	