

# Mini DP 1.2 to VGA Adapter



AY2020

The Mini DisplayPort to VGA Adapter enable you to connect any VGA interface embedded device (Monitor, Projector...) with a Mini DisplayPort interface (Desktop, Laptop) and no need to purchase any Mini DisplayPort embedded terminal device.

## Features

- Compliance with Mini DP specification V1.2, VESA DDM standard, HDCP v1.3 and EDID v1.4
- Support VESA and CEA timing standards up to UXGA and 1920x1200@60Hz
- Support 1 VGA output port
- Support main link rates of 2.7Gbps(HBR) and 1.62Gbps(RBR) from the source
- Support 1 Mini DisplayPort input port
- Support Active mode to translate the exact DP signal to VGA signal.

## Specification

Item	Description
Host Interface	MiniDP
Connectors	VGA
Power Mode	MiniDP
Power Consumption	Normal Mode: 230mA 1920x1200
Housing	Aluminum
OS compliance	Windows® 7、Windows®8、Mac OS® X
Dimensions(LxWxH)	40 x20 x 14 mm
Weight	32.6g
Operation Temperature	10~40 degree
Storage Temperature	-10~60 degree
Compliance	VGA output is compliant with VESA VSIS v1r2 specification
OS compliance	<ul style="list-style-type: none"><li>● Support Enhanced Framing Mode</li><li>● Support eDP Authentication: Alternative Scramble Seed Reset and Alternative Framing DP input detection supported</li><li>● Support Auto Power Saving mode and low stand-by current</li></ul>
Certification	FCC, CE


## System Requirements

- It works with Windows® 7, Windows® 8 and Mac® OS

## Package Contents

- Mini DP to VGA Adapter x 1
- User's Manual x 1

## Application

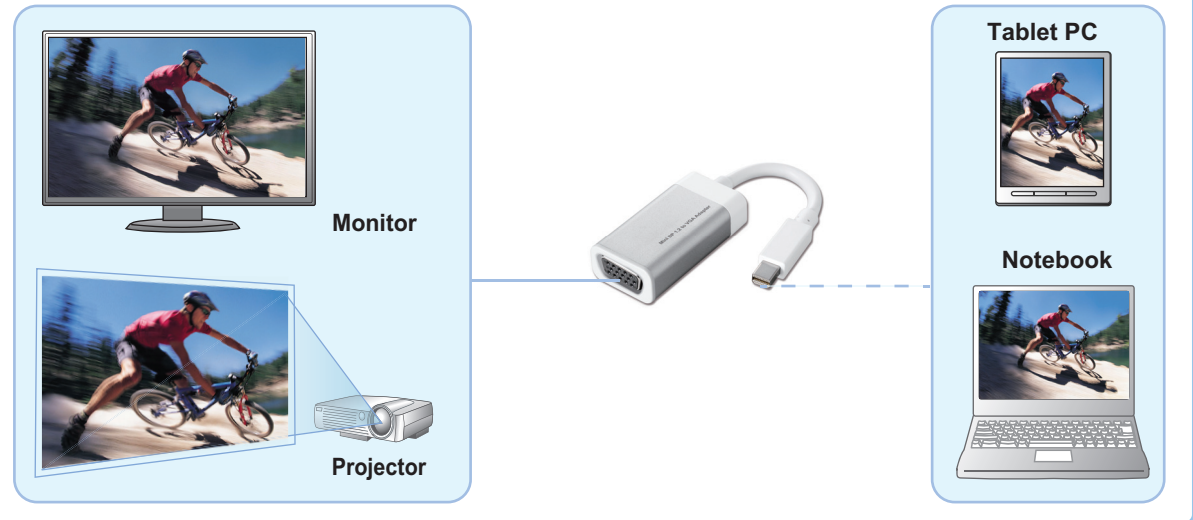

## GOOD WAY TECHNOLOGY CO., LTD.

3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan  
Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1  
<http://www.goodway.com.tw> E-mail: [sales@goodway.com.tw](mailto:sales@goodway.com.tw)