www.goodway.com .tw

USB 3.0 Dual 4K Dock

The USB 3.0 Dual 4K Dock is designed for extra connectivity demands. With the docking station, you can extend the connection of a computer to more USB peripherals. Ethernet network, the speaker and the microphone through one single USB cable.

With the built-in USB 3.0 ports, the docking station enables you to enjoy the super speed data transmission between USB peripherals. Aside from USB 3.0, this product is compliant with USB 2.0/1.1 specification.

In addition, the outstanding USB 3.0 docking station is capable of dual 4K20p60 video outputs or single 5Kp60 video output, with only one USB 3.0 cable connected to your legacy laptop PC. With the DP port, you can mirror your primary screen, or extend the Window desktop allowing visibility of more applications at the same time. Enhanced expansion capability, this docking station with video is the most versatile accessory that also complements your home or office space. *Incorporates HDMI[®] technology.

Video Output

LAN

Audio

• DP Output x2: Supports resolution up to

Two DP outputs used simultaneously, the

resolution reaches up to 5120x2880@60Hz

4096x2160@60Hz (Each)

• RJ45 Gigabit Ethernet x1

• Headphone / MIC-In

System Requirements

Supported Operating Systems:

- Windows[®] 8.1/ Windows[®] 10
- Mac OS[®]


Application

Package Content

- USB 3.0 Dual 4K Dock
- Power Adapter (20V/2.25A)
- CD (Driver and User Manual)
- Quick Installation Guide
- USB CM to BM cable
- USB AM to BM cable



USB 3.0

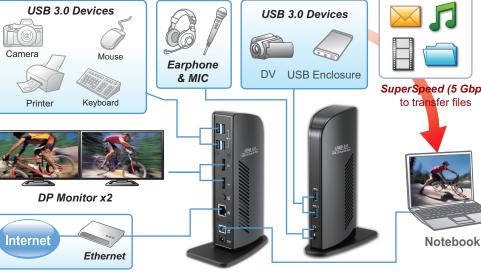

GOOD WAY TECHNOLOGY CO., LTD.



Features

- The best compatibility compared with others embedded non-USB solution
- Dual 4K or Single 5K video output
- Upstream Port • USB 3.0 Type-B
- Downstream Port • USB 3.0 Type-A x6 (One port supports BC1.2)

Specifications

User Interface	Upstream	USB 3.0 Type-B female connector
	Downstream	Video: - DP female connector x2
		USB: - Type-A female connectorx6 (One port supports BC1.2)
		LAN: - RJ45 connector x1
		Audio: - Headphone - MIC-In
Power Button	Switch	Yes
	Supply	Self-Powered: DC Jack x1, 20V/2.25A AC/DC Power adapter
Working Environment	Operation Temperature	0~40°C
	Storage Temperature	-20~70 ℃
Compliance	CE, FCC	

* Specification is subject to change without further notice.