www.goodway.com .tw

USB3.0 Dual Head Docking Station

The USB 3.0 single/dual display docking station is designed for extra connectivity demands. With the docking station, you can extend the connection of a computer to more USB peripherals, Ethernet network, the speaker and the microphone through one single USB cable. With the built-in USB 3.0 ports, the docking station enables you to enjoy the super speed data transmission between USB peripherals. Aside from USB 3.0, this product is compliant with USB 1.1/2.0 specification. You will be able to keep and use your USB 1.1/2.0 devices as usual. In addition, the docking station is equipped with video output. With the DVI and HDMI ports (HDMI only available for Dual Display Model), you can mirror your primary screen, or extend the Window desktop allowing visibility of more applications at the same time. Enhanced expansion capability plus the stylish appearance, this docking station with video is the most versatile accessory that also complements your home or office space. *Incorporates HDMI[®] technology.

Features

- Compatible with USB 3.0/2.0 specification
- Resolution up to 2048x1152
- Support audio 2.1 channel
- Support Gigabit Ethernet
- Support HDMI



HIGH-DEFINITION MULTIMEDIA INTERFACE

Specifications


Host Interface	USB 3.0		The minimum requirements for the PO
Connector	Video output	HDMI 30pin Female Connector (Dual Head model)	 are: CPU: 1.6GHz single core or higher processor clock.
		DVI HDDE 30pin Female Connector	 Intel Pentium/Celeron family AMD K6/Athlon/Duron family, or
	Host upstream link	USB B Type Female Connector	compatible processor
	HUB downstream link	USB A Type Female Connector	RAM: 1GB or above
	Audio Port	3.5mm stereo mini-jack 2.1ch	■ USB port: 2.0/3.0
	Ethernet Port	RJ45 Connector	■ 30MB of available disk space
	Power	DC power jack	 Operating Systems: Microsoft: Windows[®] 7 SP1 or later/
Video resolution	HDMI (Dual Head model)	2048x1152	Windows [®] 8/ Windows [®] 8.1 - Apple: Mac OS [®] 10.9 To play DVD on the extra connected
	DVI	2048x1152	
Supported colors	16 Bits and 32 Bits		
Audio	2.1Ch		monitor through docking station, in
Ethernet	10/100/1000		addition to the requirements above the following requirements should
Power	Power Mode	Self-powered	also be met:
	Power Adapter	Input: AC 100-240V	■ With dual core CPU at 2.0 GHz
		Output: DC 5V/4A	processor clock
	Power Consumption	Operating Power: 14.43W	
		Suspend Mode Power: 1.95W	Package Content
Physical Properties	Housing	ABS (Plastic)	 Docking Station x1 USB 3.0 Cable x1 Power Adapter x1 CD (Driver and User's Manual) x1
	Weight	365g approx.	
	Dimension	190 x 78 x 40 mm	
Working Environment	Operation Temperature	10~40 degree	
	Storage Temperature	-10~80 degree	 Quick Installation Guide x1
Compliance	CE, FCC		

* Specification is subject to change without further notice.

System Requirements

- in /e,

Application

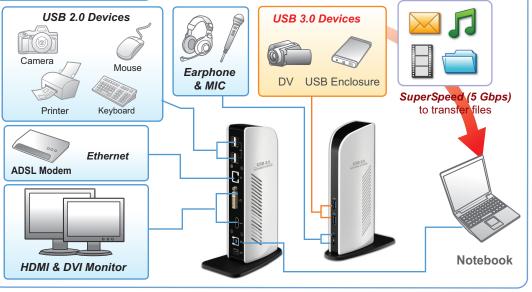

GOOD WAY TECHNOLOGY CO., LTD.



3F, No.135, Lane 235 Pau Chiao Rd., Hsin Tien, Taipei County, Taiwan Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1 http://www.goodway.com.tw E-mail:sales@goodway.com.tw