USB-C Mini Dock

The USB-C Mini Dock is designed for extra connectivity demands. With the USB-C docking station, you can extend the connection of a computer to more USB peripherals, Ethernet network, the speaker and the microphone via USB-C interface. Feel free to plug in upside down for USB-C plug is reversible. Adopting PD Charging technology, upstream charging function through USB-C interface, you can charge the docking station. With the built-in USB 3.0 ports, the docking station enables you to enjoy the super speed data transmission between USB peripherals. Aside from USB 3.0, this product is compliant with USB 2.0/1.1 specification.

In addition, the docking station is equipped with video output. With the HDMI port, you can mirror your primary screen, or extend the Window desktop allowing visibility of more applications at the same time. Enhanced expansion capability plus VESA Mount (optional), this docking station with video is the most versatile accessory that also complements your home or office space.

* Incorporates HDMI® technology.

Features


- Mini-size and fashionable ID design
- USB 3.0 Type-C technology
- Supports VESA DisplayPort Alternate Mode Standard
- Upstream Port
- USB 3.0 Type-C
- Downstream Port
- USB 3.0 Type-A female x4 (One port supports BC 1.2)
- Video output
- HDMI output supports resolution up to 3840x2160@30Hz
- RJ45 Gigabit Ethernet
- Upstream PD Charging: 5/9/12/15/20V,up to 85W, PD 85W 20V4.25A for Macbook Pro
- Combo audio iack (audio detect)
- VESA Mount (optional)

System Requirements

- PC with USB-C interface supporting VESA USB Type-C DisplayPort Alt Mode
- Supported Operating System
 - Windows® 10
 - Mac OS[®]

Package Content

- USB-C Mini Dock
- USB-C Cable
- Power Adapter (20V/5A)
- User's Manual
- VESA Mount (optional)

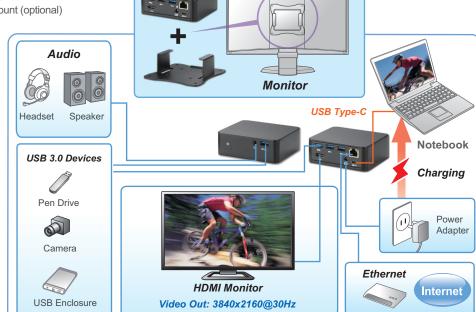

Specifications

User Interface	Upstream	USB-C female connector
	Downstream	HDMI female connector x1
		USB 3.0 female connector x4 , one port supports BC 1.2
		RJ45 connector x1
		Combo Audio Jack (IN/OUT) x1
Video	Resolution	HDMI: 3840x2160@30Hz
Audio	Channel	2.1 CH
Ethernet	Туре	10/100/1000 BASE-T
Power	Power Mode	Self-powered
	Power Adapter	Input: AC 100-240V
		Output: DC 20V/5A
Working	Operation Temperature	0~40 degree
Environment	Storage Temperature	-20~70 degree
Compliance	CE, FCC	

^{*} Specification is subject to change without further notice



GOOD WAY TECHNOLOGY CO., LTD.

DUD1230

3F, No.135, Lane 235 Pau Chiao Rd., Hsin Tien, Taipei County, Taiwan Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1 http://www.goodway.com.tw E-mail:sales@goodway.com.tw