www.goodway.com.tw

HDMI to VGA Dongle with Audio

The HDMI to VGA Dongle with Audio is a high performance single port HDMI receiver and compliant with HDMI standard. The product allows the user to convert and transmit the video signals from the HDMI embedded device, such as laptop, smart phone, tablet or PC, to the VGA embedded device, such as projector. In addition, the dongle is capable of outputting the audio signals from its audio jack. Last but not least, slim design makes the dongle handy to carry and brings the user great mobility experience. * Incorporates HDMI® technology.

Features

Slim design

Item

- Compliant with HDMI specification
- Support HDMI input and VGA output - HDMI input detection supported

Description

- VGA output detection supported

Low power architecture

Support audio jack output

- Support Auto Power Saving mode and low stand-by current

System Requirements

Operating Systems:

■ Windows[®] 7/ Windows[®] 8/ Windows[®] 8.1 Mac OS[®]

Package Contents


HDMI to VGA Dongle with Audio x 1

VS5010

Tablet PC

Notebook

User's Manual x1

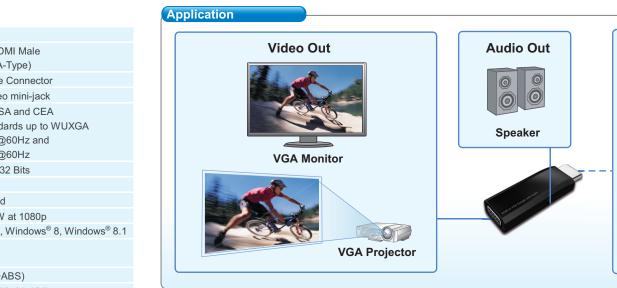

GOOD WAY TECHNOLOGY CO., LTD.

3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1 http://www.goodway.com.tw E-mail:sales@goodway.com.tw

Specifications

Item	Description	
Connector	Video Input	Standard HDMI Male Connector(A-Type)
	Video Output	VGA Female Connector
	Audio Port	3.5mm stereo mini-jack
Video	Resolution	Support VESA and CEA Timing standards up to WUXGA 1920x1200@60Hz and 1920x1080@60Hz
	Color Depth	16 Bits and 32 Bits
Audio	Channel	2.1 CH
Power	Power Mode	Bus-powered
	Power Consumption	Max. 512mW at 1080p
Supported Operating System	Microsoft	Windows [®] 7, Windows [®] 8, Windows [®] 8.1
	Apple	Mac OS [®]
Physical	Housing	Plastic(PC+ABS)
Properties	Dimension	62.8(L)x21(W)x54.4(H)mm
	Weight	13.4g approx.
Working	Operation	10°C ~40°C
Environment	Temperature	
	Storage Temperature	-20° ℃~70°℃
Compliance		CE, FCC
* Specification is subject to change without further notice.		